

Grande SERIES

Model G24SP
G24LP/G24FL



G24SP: Shown with optional Sunburst 4 door lites.



G24LP: 24 gauge door, 43"x14" Ultra high definition long panel (LP),
Shown with optional long panel Cascade door lites.

G24FL: 24 gauge door,
flush panel (LP)

G24SP: 24 gauge door,
20"x14" Ultra high definition
short panel (SP)

The Grande Series is undeniably the best in its class. Manufactured with the most durable materials and finished with ultra high definition raised panels or the flush look of the G24FL. This, plus the deeply embossed woodgrain texture, guarantee that the Grande Series will add value and style to upscale homes.



Outstanding construction of 24 gauge deeply embossed steel with 2" thick insulation.

1ST United Door Technologies

7255 S. Kyrene, Suite #104
Tempe, Arizona 85283
Phone: 480-705-6632
Fax: 480-705-8497
sales@firstudt.com

1ST UNITED DOOR TECHNOLOGIES
UDT
WWW.FIRSTUDT.COM

Riverside California Distribution Center

1885 Iowa Avenue
Riverside, CA 92507
Phone: 951-787-8956
Fax: 951-905-5211
calsales@firstudt.com

Grande Series Model G24SP, G24LP & G24FL

• Superior Value • Versatile Design

High quality, 24 gauge 2-inch thick uninsulated steel door. The Grande Series sets the standard by which all other doors of this type are measured; it is undeniably the best in its class.


Specifications: Sections are 2 inches thick in 21- and 18-inch heights. Each section is manufactured from 24 gauge hot-dipped galvanized steel. Sections are pre-painted white and rotary embossed with a woodgrain texture. Ultra high definition raised panels are pressed in 1/8" height increments to a depth of .375". Tongue and groove-meeting rails are roll formed into the panel, incorporating the RITS™ reinforced integral truss system. Vertical stile members are 19 gauge hot-dipped galvanized I-beams pre-painted white to match the interior side of the section. Stiles are riveted and bonded to the interior face of the door with an epoxy-based cement. Bottom sections are reinforced with aluminum "L" angle and bonded to the bottom of the section for supporting a replaceable UV protected bottom weather seal.

H-2 Hardware and Track: is hot-dipped galvanized, 14 gauge wide body end roller hinges and 16 gauge interior hinges. Rollers are 2-inch black nylon, galvanized torsion tube, self-locking fasteners, pre-painted springs and inside slide lock.



Optional Energy Efficient Insulation

CFC free Polystyrene insulation with a rigid vinyl back skin, R factor of 6.25. Laminated PVC backing is available as a factory installed option.



Exclusive RITS™ Design


Exclusive RITS™ "Reinforced Integral Truss System" design, for increased section strength and wind-load capabilities that include tongue and groove weather resistant meeting rails.



Reinforced Aluminum Bottom Extrusion

Heavy duty grooved "U" type weather seal is set into an aluminum reinforced "L" angle, and bonded to the bottom section.

Ten Coat Rust Protection

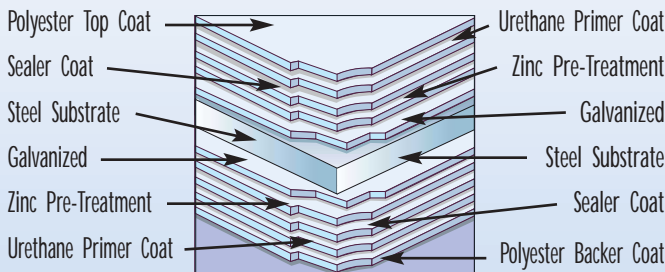

White



Almond


Available in:

Distributed By:

www.firstudt.com

Upgrade Options:

Glass Designs: 2 panel, 3 panel, 4 panel & 8 panel designs

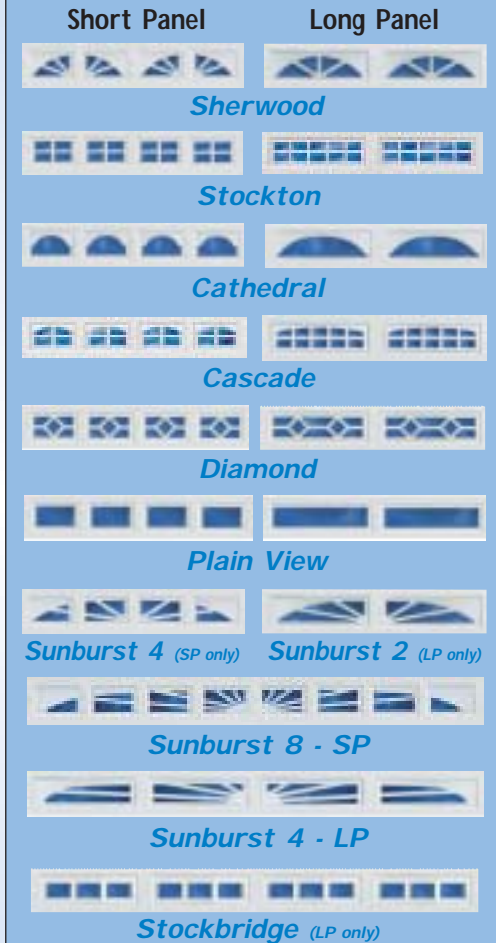

Hardware:

H-3 Optional hardware includes 14 gauge commercial hinges throughout. Commercial top fixtures and heavy-duty bottom fixtures, 10 ball white nylon rollers, double lift handles, inside slide lock, back-hang fasteners, pre-painted springs, galvanized torsion tube, .051 gauge Vertical track and .060 gauge Horizontal track.

Insulation:

CFC free Polystyrene insulation with a rigid high impact vinyl back skin, with an R-factor of 6.25.

Widths & Heights:

Widths: 6', 8', 9', 10', 12', 14', 15'-1" (SP), 15'-4" (LP), 16', 18', & 20'

Heights: 6', 6'-3", 6'-6", 6'-9", 7', 7'-6", 7'-9", 8'

WARRANTY

First United Door Technologies warrants each garage door and component parts to be free from defects in material and workmanship to the original purchaser.

A copy of this warranty is available upon request.

sales@firstudt.com



08 36 13/FIR
BuyLine 4566



Grande Series 0705